



LAXMI



LAXMI

Leading Aluminium Solutions for Every Need

Innovative Designs | Premium Quality |
Sustainable Manufacturing





About Us

- ▶ Laxmi Aluminium is a leading provider of premium aluminium solutions, catering to architectural, industrial, and transport needs. With a commitment to innovation, quality, and sustainability, we deliver high-performance aluminium profiles designed for durability, strength, and aesthetic appeal.

Why Choose Laxmi Aluminium?

- ▶ Superior Quality – Precision-engineered, high-strength aluminium.
- ▶ Versatile Applications – Solutions for architecture, transport, industry, and interiors.
- ▶ Durable & Reliable – Corrosion-resistant, high-load-bearing materials.
- ▶ Sustainable & Eco-Friendly – 100% recyclable aluminium with energy-efficient manufacturing.
- ▶ Customization Available – Tailored solutions for unique project requirements.



Certificate of Registration

This is to certify that

LAXMI ALUMINIUM INDUSTRIES PVT. LTD.

DUHABI-3, SONOPUR, SUNSORI, NEPAL.

has been independently assessed by QRO
and is compliant with the requirement of:

ISO 9001:2015

Quality Management System

For the following scope of activities:

**MANUFACTURING & PRODUCTION OF ALUMINIUM PROFILE AND
ALUMINIUM BILLET.**

Date of Certification: 23rd January 2024

1st Surveillance Audit Due: 22nd January 2025

2nd Surveillance Audit Due: 22nd January 2026

Certificate Expiry: 22nd January 2027

Certificate Number: 305024012309Q



Chumant...

Head of Certification

Validity of this certificate is subject to annual surveillance audits to be done successfully on or before 365 days from date of the audit.
(In case surveillance audit is not allowed to be conducted; this certificate shall be suspended / withdrawn).

The Validity of this certificate can be verified at www.qrocert.org

This certificate of registration remains the property of QRO Certification LLP, and shall be returned immediately upon request.

India Office : QRO Certification LLP

142, 11nd Floor, Avtar Enclave, Near Paschim Vihar West Metro Station, Delhi-110063, (INDIA)

Website : www.qrocert.org, E-mail : info@qrocert.org

Wrought Alloys : Chemical Composition Limits (per cent)

Alloy (ISS)	Old	New	Equivalent alloy (AA)	U.S.A.Min.	Copper		Magnesium		Silicon		Iron Max	Manganese		* Others (Total) Max	Remarks
					Min.	Max.	Min.	Max.	Min.	Max.		Min.	Max.		
1 C	19000	1100	-	-	0.10	-	-	-	0.5	0.6	-	0.1	0.1	Aluminium 99.0% Min	
		1200	-	-	0.05	-	-	Si+Fe	1.0	-	-	0.05	0.1	Aluminium 99.0% Min	
1 B	19500	1050	-	-	0.05	-	-	-	0.25	0.4	-	0.05	0.1	Aluminium 99.5% Min	
1 E	19501	-	-	-	0.04	-	-	-	0.15	0.35	-	0.03	0.1	Aluminium 99.5% Min	
	-	1350	-	-	0.05	-	-	-	0.10	0.40	-	0.01	0.1	Aluminium 99.5% Min	
	19600	1060	-	-	0.05	-	-	-	0.25	0.35	-	0.03	0.1	Aluminium 99.6% Min	
	19700	1070	-	-	0.03	-	-	-	0.2	0.25	-	0.03	0.1	Aluminium 99.7% Min	
H 15	24345	2014	3.8	5.0	0.2	0.8	0.5	1.2	0.7	0.3	1.2	0.5	-	-	
H 14	24534	2017	3.5	4.7	0.4	1.2	0.2	0.7	0.7	0.4	1.2	0.5	-	-	
N3	31000	3003	-	-	0.1	-	0.1	-	0.6	0.7	1.0	1.5	0.4	-	
N21	43000	4043	-	-	0.1	-	0.2	4.5	6.0	0.6	-	0.5	0.2	-	
N2	46000	4047	-	-	0.1	-	0.2	10.0	13.0	0.6	-	0.5	0.2	-	
N4	52000	5052	-	-	0.1	1.7	2.6	-	0.6	0.5	-	0.5	0.4	Cr + Mn = 0.5%	
N5	53000	5086	-	-	0.1	2.8	4.0	-	0.6	0.5	-	0.5	0.4	Cr + Mn = 0.5 %	
N6	55000	5056	-	-	0.1	4.5	5.6	-	0.6	0.7	-	0.5	0.4	Chromium upto 0.25%	
N8	54300	5083	-	-	0.1	4.0	4.9	-	0.4	0.7	0.5	1.0	0.4	Chromium upto 0.25 %	
H 20	65032	-	0.15	0.4	0.7	1.2	0.4	0.8	0.7	0.2	0.8	0.4	**Cr =0.15-0.35%		
	-	6061	0.15	0.4	0.8	1.2	0.4	0.8	0.7	-	0.15	0.4	Chromium 0.04 to 0.35 %		
H 9	63400	6063	-	-	0.1	0.4	0.9	0.3	0.7	0.6	-	0.3	0.4	-	
	-	6066	0.7	1.2	0.8	1.4	0.9	1.8	0.7	0.6	1.1	0.4	-	-	
	64423	-	0.5	1.0	0.5	1.3	0.7	1.3	0.8	4-	1.0	-	-	-	
91E	63401	6101	-	-	0.05	0.4	0.9	0.3	0.7	0.5	-	0.03	0.1	-	
	64401	6201	-	-	0.1	0.6	0.9	0.5	0.9	0.5	-	0.03	0.1	-	
H 30	64430	6351	-	-	0.1	0.4	1.2	0.6	1.3	0.6	0.4	1.0	0.3	-	
	-	6082	-	-	0.1	0.6	1.2	0.7	1.3	0.5	0.4	1.0	0.3	Chromium upto 0.25%	
	74530	7039	-	-	0.2	1.0	1.5	-	0.4	0.7	0.2	0.7	0.4	Zinc 4.0 - 5.0	
	-	7075	1.2	2.0	2.1	2.9	-	0.5	0.5	-	0.3	0.2	-	Zinc (5.1 -6.1)% & Chromium(0.18-0.4)	

Solid Section : Thickness Tolerance

Specified Thickness (mm)	Width of Section (mm)															
	12	16	20	25	32	40	50	63	80	100	125	160	200	250	320	
1.2	0.20	0.20	0.20	0.20	0.20											
1.6	0.18	0.20	0.20	0.20	0.20											
2.0	0.18	0.20	0.20	0.20	0.20	0.23	0.25		0.28	0.30	0.33	0.36	0.38	0.41	0.46	
2.5	0.18	0.20	0.20	0.20	0.20	0.23	0.25	0.25	0.28	0.30	0.33	0.36	0.38	0.41	0.46	
3.2	0.18	0.20	0.20	0.20	0.20	0.23	0.25	0.28	0.30	0.33	0.36	0.38	0.41	0.43	0.48	
4.0	0.20	0.23	-0.23	0.23	0.25	0.28	0.30	0.33	0.36	0.38	0.43	0.43	0.46	0.51		
5.0	0.20	0.23	0.23	0.23	0.25	0.28	0.30	0.33	0.36	0.38	0.41	0.43	0.46	0.51		
6.0	0.20	0.23	0.23	0.23	0.25	0.28	0.30	0.33	0.36	0.38	0.41	0.46	0.51	0.56	0.66	
8.0	0.23	0.25	0.25	0.25	0.28	0.30	0.33	0.36	0.38	0.43	0.48	0.53	0.58	0.71		
10.0	0.23	0.25	0.25	0.25	0.28	0.30	0.33	0.36	0.38	0.43	0.48	0.53	0.58	0.71		
12.0	0.25	0.28	0.28	0.28	0.30	0.33	0.36	0.38	0.41	0.46	0.48	0.53	0.58	0.74	0.97	
16.0	0.28	0.30	0.30	0.30	0.33	0.36	0.38	0.41	0.43	0.48	0.51	0.56	0.61	0.76	1.02	
20.0	-	0.30	0.30	0.30	0.36	0.38	0.41	0.43	0.46	0.51	0.53	0.61	0.69	0.79	1.04	
25.0	-	0.30	0.30	0.30	0.36	0.38	0.41	0.43	0.46	0.51	0.53	0.61	0.69	0.79	1.04	
32.0	-	-	-	-	0.38	0.41	0.43	0.46	0.48	0.53	0.56	0.66	0.74			
40.0	-	-	-	-	-	0.46	0.48	0.51	0.53	0.56	0.61	0.71	0.79			
50.0	-	-	-	-	-	-	0.53	0.56	0.58	0.61	0.66	0.76	0.84			
63.0	-	-	-	-	-	-	-	0.61	0.64	0.66	0.71	0.81	0.89			
80.0	-	-	-	-	-	-	-	-	0.69	0.71	0.74	0.86	0.94			
100.0	-	-	-	-	-	-	-	-	-	0.76	0.79	0.91	0.99			
125.0	-	-	-	-	-	-	-	-	-	-	0.89	0.97	1.04			

Round Tube : Wall Thickness Tolerance

Specified Wall Thickness (mm)	Tolerance (mm)	
	Class 1 \pm	Class 2 \pm
Upto 1.2	0.30	-
1.60	0.30	-
1.80	0.30	-
2.00	0.30	-
2.24	0.30	-
2.50	0.33	-
2.80	0.36	-
3.15	0.40	0.90
3.55	0.43	0.94
4.00	0.48	0.97
4.50	0.51	1.02
5.00	0.56	1.07
5.50	0.61	1.12
6.30	0.67	1.18
7.10	0.76	1.27
8.00	0.97	1.47
9.00	1.10	1.60
10.00	1.22	1.73
11.20	1.28	1.79
12.50	1.35	1.85

Wrought Alloys : Mechanical Properties

Non-Heat Treatable Alloys					
Alloy AA Old (ISS) New (ISS)	Temper	Ultimate Tensile Strength Kg/mm ²		0.2% Proof Stress Kg/mm ²	Elongation On 50 mm GL
		Min.	Max.		
1100[1C][19000]	o	-	11.0	-	25
1050[1B][19500]	o	-	10.0	-	25
1060[19600]	o	-	9.5	-	25
1070[19700]	o	-	9.5	-	25
4043[N21][43000]	o	-	13.0	-	18
4047[N2] [46000]	o	-	15.0	-	12
5052[N4] [52000]	o	-	24.5	-	18
5086[N5] [53000]	o	-	26.5	-	16
5056[N6] [55000]	o	-	34.5	-	15
5083[N8] [54300]	o	-	35.5	-	13
Heat Treatable Alloys					
2014 [H15] [24345]	T4[W] T6 [WP]	39 49	- -	24.0 43.0	10 6
2017 [H14] [24534]	T4[W]	39	-	24.0	10
6063 [H9] [63400]	T4[W] T6 [WP]	14 19	- -	8.0 15.5	14 7
6061 [H20] [65032]	M or o T4[W] T6 [WP]	- 19 28.5	15.0 - -	- 11.5 24.0	16 14 7
6351[H30] [64430]	M or o T4[W] T6 [WP]	- 19 31.5	15 - -	- 12.0 27.5	16 14 7
6066	o T4[W] T6 [WP]	- 28 35	20.5 - -	- 17.5 31.5	16 14 7
6101[91E] [63401]	T4[W] T6 [WP]	14 20.5	- -	8.0 17.0	12 10
6201 [64401]	T4[W] T8 [WDP]	16 32	- -	7.0 -	14 3
7039 [74530]	T4[W] T6 [WP]	28 31.5	- -	23.5 26.5	9 7
7075	T6 [WP]	54	-	46.5	6

Solid & Hollow Section: Flatness Tolerance

Width of section (mm) A		Tolerance B
Over	Upto & including	\pm mm
-	25	0.18
25	38	0.25
38	50	0.30
50	-	0.30 plus 0.13 mm for every 25 mm of width (see ex.below)

Solid & Hollow Section: Twist & Straightness Tolerance

Diameter of circumscribing circle mm	Allowable deviation from straightness mm per metre or length
Upto & including 25.0	2.1
Over 25.0	1.7

Solid & Hollow Section: Cut Length Tolerance

Width or diameter mm	Length tolerance mm \pm
Upto 50.0	6
50.1 to 100.0	8
100.1 to 150.0	10
150.1 and above	12

Hollow Section: Wall Thickness Tolerance

Wall Thickness mm		Width or overall dimensions (mm)													
		Over 10.0 Upto 20.0	20.0 33.0	30.0 40.0	40.0 50.0	50.0 60.0	60.0 80.0	80.0 100.0	100.0 120.0	120.0 140.0	140.0 160.0	160.0 180.0	180.0 200.0	200.0 225.0	225.0 250.0
Class B															
Over	Upto														
1.0	1.5	0.28	0.28	0.28	0.30	-	-	-	-	-	-	-	-	-	-
1.5	2.0	0.30	0.33	0.33	0.36	-	-	-	-	-	-	-	-	-	-
2.0	2.5	0.33	0.33	0.36	0.38	0.43	0.46	-	-	-	-	-	-	-	-
2.5	3.0	0.41	0.43	0.46	0.48	0.51	0.53	0.56	-	-	-	-	-	-	-
3.0	4.0	0.53	0.56	0.58	0.61	0.64	0.66	0.69	0.71	0.74	-	-	-	-	-
4.0	5.0	-	0.71	0.74	0.76	0.79	0.81	0.84	0.86	0.89	0.91	0.94	1.02	-	-
5.0	6.0	-	-	0.97	0.99	1.02	1.04	1.07	1.09	1.12	1.14	1.17	1.19	1.22	1.24
6.0	8.0	-	-	-	1.22	1.24	1.27	1.30	1.32	1.35	1.37	1.40	1.42	1.45	1.47
8.0	10.0	-	-	-	-	1.47	1.50	1.52	1.55	1.57	1.60	1.63	1.65	1.68	1.70
10.0	12.0	-	-	-	-	1.73	1.75	1.78	1.8	1.83	1.85	1.88	1.90	1.93	1.96
12.0	16.0	-	-	-	-	-	1.98	2.00	2.03	2.06	2.08	2.11	2.13	2.16	2.18
16.0	20.0	-	-	-	-	-	-	2.24	2.26	2.29	2.31	2.34	2.36	2.39	2.41
20.0	25.0	-	-	-	-	-	-	2.49	2.51	2.54	2.57	2.59	2.62	2.64	2.67
Class A															
1.5	2.0	0.28	0.30	0.30	0.33	-	-	-	-	-	-	-	-	-	-
2.0	2.5	0.30	0.30	0.33	0.36	0.41	0.43	-	-	-	-	-	-	-	-
2.5	3.0	0.30	0.30	0.36	0.38	0.43	0.46	0.51	-	-	-	-	-	-	-
3.0	4.0	0.33	0.36	0.38	0.41	0.46	0.51	0.56	0.61	0.69	-	-	-	-	-
4.0	5.0	-	0.41	0.43	0.46	0.51	0.56	0.61	0.69	0.76	0.84	0.91	0.99	-	-
5.0	6.0	-	-	0.46	0.51	0.56	0.61	0.69	0.76	0.84	0.91	0.99	1.07	-	-
6.0	8.0	-	-	-	0.56	0.61	0.69	0.76	0.84	0.91	0.99	1.07	1.14	-	-
8.0	10.0	-	-	-	-	0.69	0.76	0.84	0.91	0.99	1.07	1.14	1.22	-	-
10.0	12.0	-	-	-	-	0.76	0.84	0.91	0.99	1.07	1.14	1.22	1.30	-	-
12.0	16.0	-	-	-	-	-	0.91	0.99	1.07	1.14	1.22	1.30	1.37	-	-
16.0	20.0	-	-	-	-	-	-	1.07	1.14	1.22	1.30	1.37	1.45	-	-
20.0	25.0	-	-	-	-	-	-	1.14	1.22	1.30	1.37	1.45	1.52	-	-



Table of Content

1. Architechural Section List	1
• 78 Series	2
• 90 Series	7
• 100 Series	14
Sliding Window	15
Door, Chowkhat & Partition Section	19
Casment Section	24
Curtain Wall & Glazing Section	29
• Domal Series	32
• 18MM Sliding Window	35
• Kitchen Series	39
• Miscellaneous/ Genearl Purpose	45

Architectural Sections



◆ 78 Series

- Sliding Window

◆ 90 Series

- Sliding Window

◆ 100 Series

- Sliding Window
- Door, Chowkhat & Partition Section
- Casement Section
- Curtain Wall & Glazing Section

◆ Domal Series

- Sliding Window

◆ 18MM Sliding Window

- Two Track Top
- Two Track Bottom
- Three Track Top
- Three Track Bottom
- A Section
- H Section
- Interlock

◆ Kitchen Series

- Kitchen Profile Cabinet Sections

◆ Miscellaneous

- Sliding Section
- Corner Section
- L tube
- Photo Frame
- L Section
- Rectangular Tube
- Square Tube
- Tower Bolt










▶ 78 Series


- Sliding Window

78 Series Sliding Window

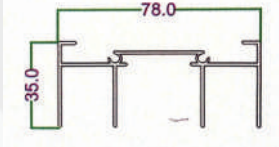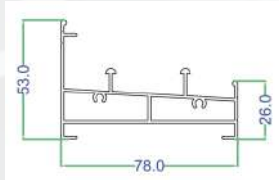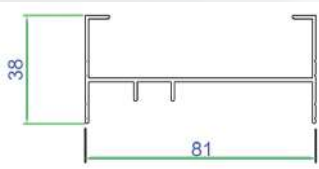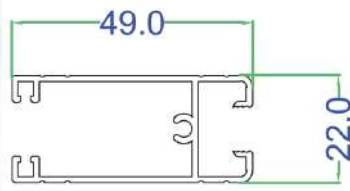
				
Section Number	Thickness (mm)	Nominal Weight (kg/m)	Weight Range(kg/6.1m)	
			Min.	Max.
78-1 Top	0.7	0.450	2.70	2.90
	0.9	0.574	3.5	3.7
				
Section Number	Thickness (mm)	Nominal Weight (kg/m)	Weight Range(kg/6.1m)	
			Min.	Max.
78-2 Bottom	0.7	0.672	4.1	4.3
	0.9	0.705	4.3	4.5
				
Section Number	Thickness (mm)	Nominal Weight (kg/m)	Weight Range(kg/6.1m)	
			Min.	Max.
78-3 Side	0.7	0.344	2.1	2.3
	0.9	0.443	2.7	2.9
				
Section Number	Thickness (mm)	Nominal Weight (kg/m)	Weight Range(kg/6.1m)	
			Min.	Max.
78-4 Wheel	0.7	0.311	1.9	2.1
	0.9	0.410	2.5	2.7

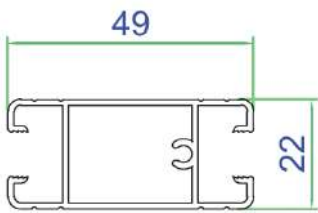


Section Number	Thickness (mm)	Nominal Weight (kg/m)	Weight Range(kg/6.1m)	
			Min.	Max.
78-4(A)	0.8	0.393	2.4	2.6
	0.9	0.443	2.7	2.9

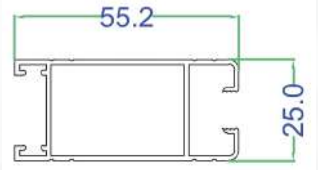


Section Number	Thickness (mm)	Nominal Weight (kg/m)	Weight Range(kg/6.1m)	
			Min.	Max.
78-6 Lock	0.7	0.328	2.0	2.2
	0.9	0.426	2.6	2.8

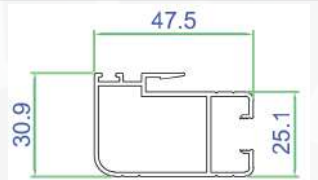


Section Number	Thickness (mm)	Nominal Weight (kg/m)	Weight Range(kg/6.1m)	
			Min.	Max.
78-7 Inter Lock	0.7	0.328	2.0	2.2
	0.9	0.451	2.70	2.90

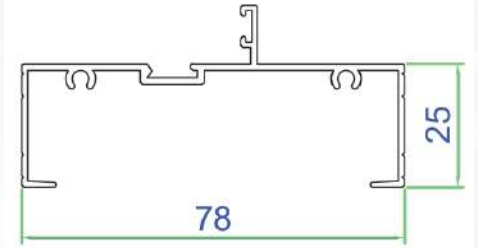

Section Number	Thickness (mm)	Nominal Weight (kg/m)	Weight Range(kg/6.1m)	
			Min.	Max.
78-11B	0.7	0.344	2.1	2.3
	0.9	0.418	2.50	2.70

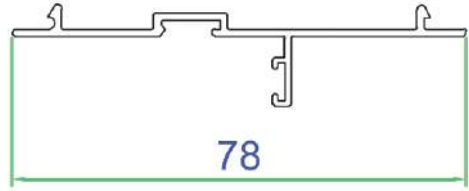


Section Number	Thickness (mm)	Nominal Weight (kg/m)	Weight Range(kg/6.1m)	
			Min.	Max.
78-13D	0.9	0.287	1.70	1.9

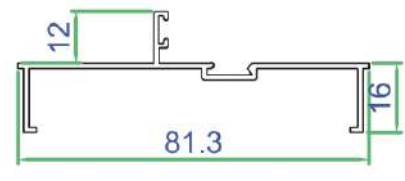


Cover Plate

Section Number	Thickness (mm)	Nominal Weight (kg/m)	Weight Range(kg/6.1m)	
			Min.	Max.
78-13	0.9	0.443	1.6	1.8




Net Section

Section Number	Thickness (mm)	Nominal Weight (kg/m)	Weight Range(kg/6.1m)	
			Min.	Max.
78-9	0.7	0.197	1.2	1.4



Clip

Section Number	Thickness (mm)	Nominal Weight (kg/m)	Weight Range(kg/6.1m)	
			Min.	Max.
78-Clip	0.65	0.075	0.40	0.60

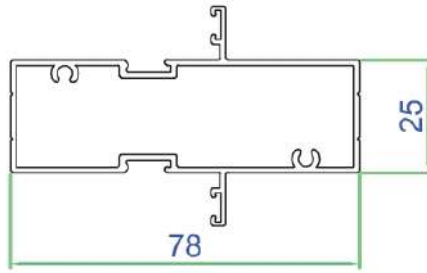


Section Number	Thickness (mm)	Nominal Weight (kg/m)	Weight Range(kg/6.1m)	
			Min.	Max.
78-18	0.7	0.572	3.40	3.60




▶ 90 Series

- Sliding Window


90 Series Sliding Window

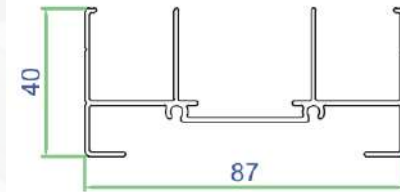


Section Number	Thickness (mm)	Nominal Weight (kg/m)	Weight Range(kg/6.1m)	
			Min.	Max.
90-1 Top	0.7	0.508	3.1	3.3
	0.9	0.656	4.0	4.2
	1.03	0.688	4.2	4.4
	1.3	0.869	5.3	5.5
	1.5	1.033	6.3	6.5
	2	1.344	8.2	8.4

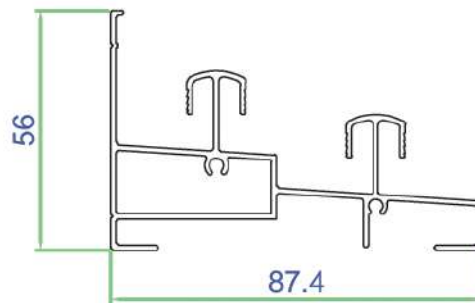


Section Number	Thickness (mm)	Nominal Weight (kg/m)	Weight Range(kg/6.1m)	
			Min.	Max.
90-2 Bottom	0.7	0.840	4.0	4.2
	0.9	0.870	5.0	5.2
	1.03	0.902	5.5	5.7
	1.3	1.148	7.2	7.4
	1.5	1.344	8.2	8.4
	2	1.640	10.0	10.2

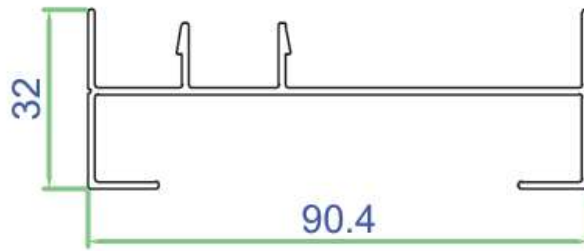


Section Number	Thickness (mm)	Nominal Weight (kg/m)	Weight Range(kg/6.1m)	
			Min.	Max.
90-3 Side	0.7	0.377	2.3	2.5
	0.9	0.508	3.1	3.3
	1.03	0.532	3.20	3.4
	1.3	0.680	4.10	4.3
	1.5	0.738	4.50	4.70
		1.010	6.2	6.4

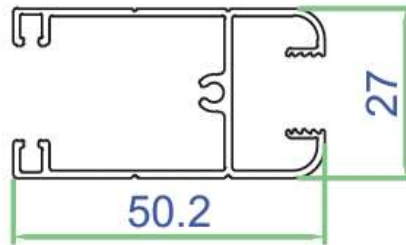


Section Number	Thickness (mm)	Nominal Weight (kg/m)	Weight Range(kg/6.1m)	
			Min.	Max.
90-4 Small wheel	0.7	0.377	2.3	2.50
	0.9	0.492	3.0	3.2
	1.03	0.508	3.1	3.3
	1.3	0.590	3.6	3.8
	1.5	0.655	4.0	4.2

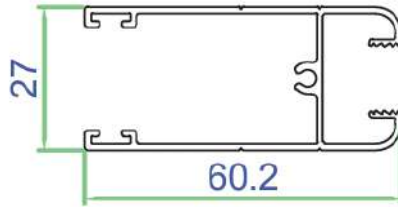


Section Number	Thickness (mm)	Nominal Weight (kg/m)	Weight Range(kg/6.1m)	
			Min.	Max.
90-5 Big wheel	0.7	0.409	2.5	2.7
	0.9	0.492	3.0	3.2
	1.03	0.492	3.1	3.3
	1.3	0.613	3.7	3.9
	1.5	0.696	4.2	4.4

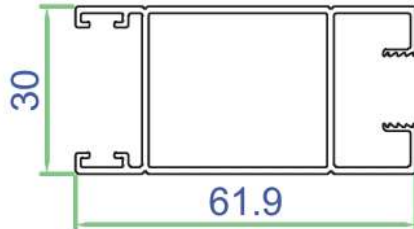

Section Number	Thickness (mm)	Nominal Weight (kg/m)	Weight Range(kg/6.1m)	
			Min.	Max.
90-6 Lock	0.7	0.442	2.7	2.9
	0.8	0.490	2.9	3.1
	0.9	0.532	3.2	3.4
	1.03	0.573	3.5	3.7
	1.3	0.718	4.3	4.6
	1.5	0.803	4.9	5.1

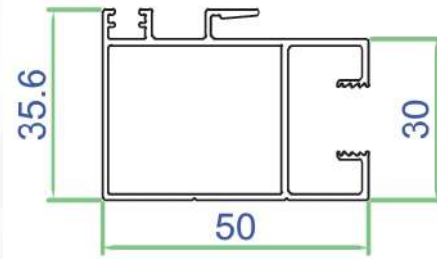


Section Number	Thickness (mm)	Nominal Weight (kg/m)	Weight Range(kg/6.1m)	
			Min.	Max.
90-7 Inter Lock	0.7	0.442	2.7	2.9
	0.9	0.524	3.2	3.4
	1.03	0.549	3.30	3.50
	1.3	0.685	4.10	4.30
	1.5	0.770	4.9	5.1

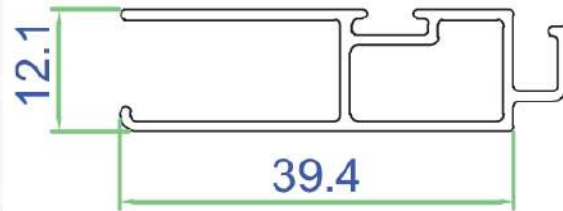


Net Section


Section Number	Thickness (mm)	Nominal Weight (kg/m)	Weight Range(kg/6.1m)	
			Min.	Max.
90-Net Section	0.7	0.213	1.3	1.5
	1.2	0.327	2.0	2.2
	1.3	0.360	2.2	2.4

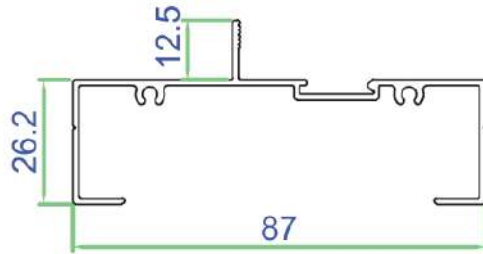

Section Number	Thickness (mm)	Nominal Weight (kg/m)	Weight Range(kg/6.1m)	
			Min.	Max.
90-11B	0.7	0.393	2.4	2.6
	0.9	0.492	3.0	3.2
	1.03	0.516	3.10	3.30
	1.3	0.655	4.0	4.2
	1.5	0.770	4.7	4.9
	2.0			

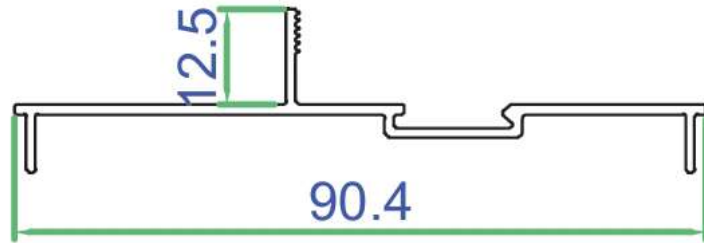


Section Number	Thickness (mm)	Nominal Weight (kg/m)	Weight Range(kg/6.1m)	
			Min.	Max.
90-Cover Plate	0.9	0.295	1.8	2.0

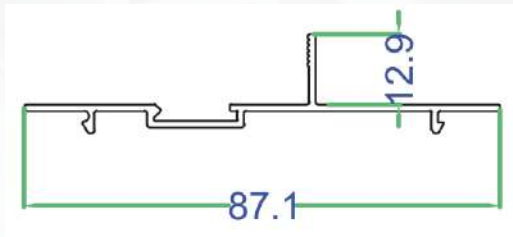

Venti Plate

Section Number	Thickness (mm)	Nominal Weight (kg/m)	Weight Range(kg/6.1m)	
			Min.	Max.
90-Venti Plate	0.9	0.270	1.7	1.9




Section Number	Thickness (mm)	Nominal Weight (kg/m)	Weight Range(kg/6.1m)	
			Min.	Max.
90-Clip	0.9	0.492	0.45	0.70


► 100 Series

- Sliding Window
- Door, Chowkhat & Partion Section
- Casement Section
- Curtain Wall & Galzing Section


Sliding Window

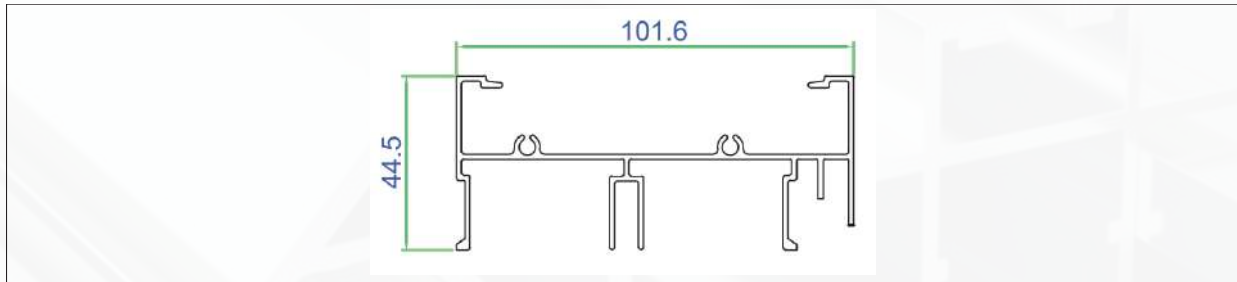


Section Number	Thickness (mm)	Nominal Weight (kg/m)	Weight Range(kg/6.1m)	
			Min.	Max.
100-1 Top	1.125	0.984	6.00	6.20
	1.3	1.032	6.2	6.5
	1.5	0.918	7.2	7.3

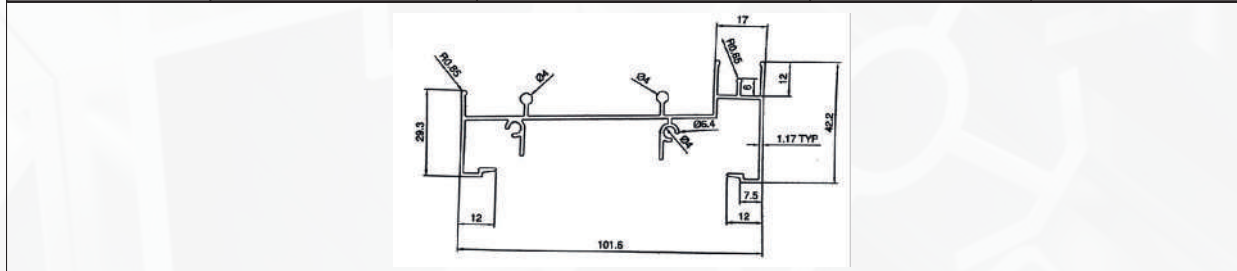


Section Number	Thickness (mm)	Nominal Weight (kg/m)	Weight Range(kg/6.1m)	
			Min.	Max.
100-2 Bottom	1.0	0.918	5.6	5.8
	1.3	1.032	6.2	6.5
	1.5	1.115	6.8	7.0

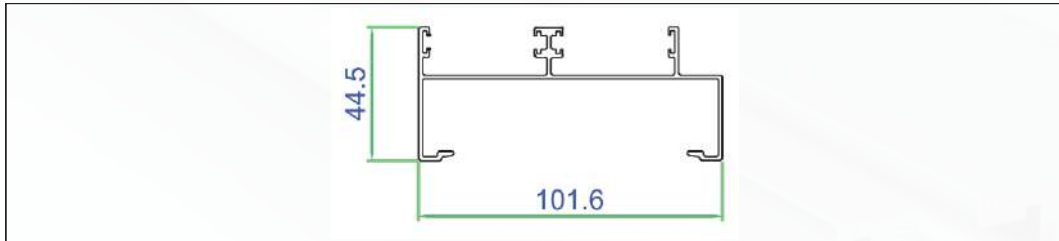


Section Number	Thickness (mm)	Nominal Weight (kg/m)	Weight Range(kg/6.1m)	
			Min.	Max.
100-3 Side	1.0	0.819	5.0	5.2
	1.3	0.901	5.5	5.7
	1.5	1.147	7.0	7.2

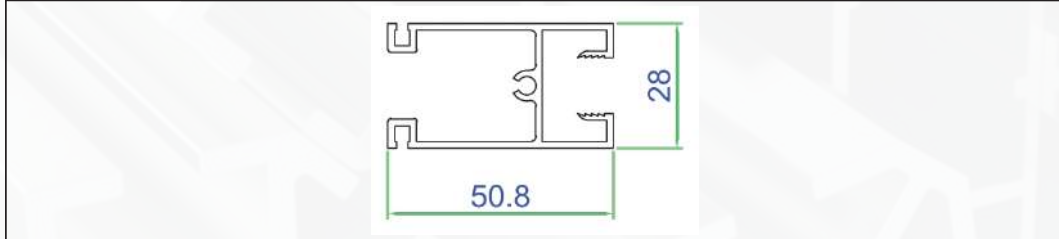


Section Number	Thickness (mm)	Nominal Weight (kg/m)	Weight Range(kg/6.1m)	
			Min.	Max.
100-4 Small Wheel	1.0	0.566	3.40	3.60
	1.3	0.655	3.9	4.2
	1.5	0.721	4.2	4.4

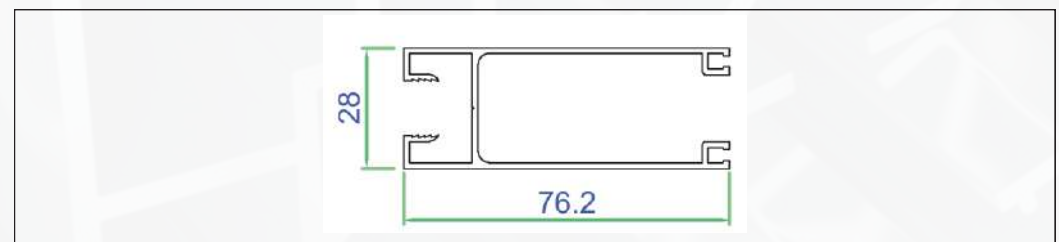


Section Number	Thickness (mm)	Nominal Weight (kg/m)	Weight Range(kg/6.1m)	
			Min.	Max.
100-5 Big Wheel	1.2	0.705	4.3	4.5
	1.3	0.852	5.2	5.4
	1.5	0.901	5.5	5.6

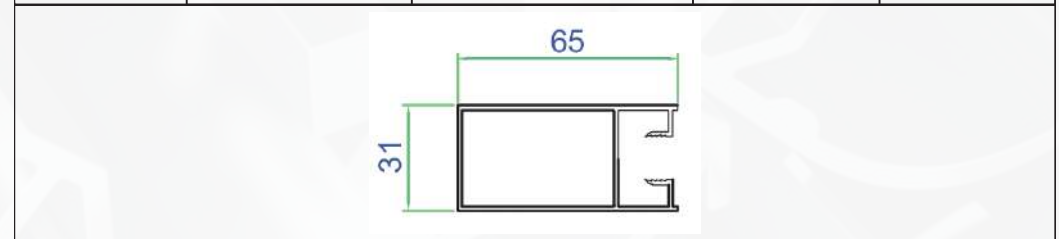


Section Number	Thickness (mm)	Nominal Weight (kg/m)	Weight Range(kg/6.1m)	
			Min.	Max.
100-6 Lock	0.9	0.459	2.8	3.1
	1.2	0.639	3.9	4.1
	1.3	0.69	4.2	4.4
	1.5	0.852	5.2	5.4

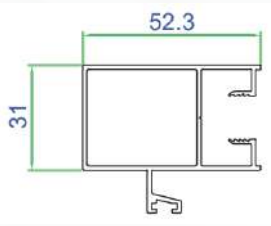

Section Number	Thickness (mm)	Nominal Weight (kg/m)	Weight Range(kg/6.1m)	
			Min.	Max.
100-7 Interlock	1.0	0.639	3.9	4.1
	1.3	0.704	4.2	4.5
	1.5	0.852	5.2	5.4

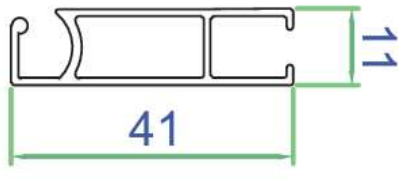


Section Number	Thickness (mm)	Nominal Weight (kg/m)	Weight Range(kg/6.1m)	
			Min.	Max.
100-32 Net Section	1.0	0.278	1.7	1.9

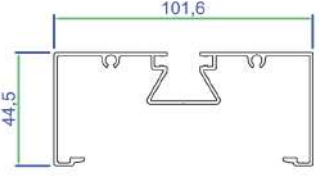


Cover Plate

Section Number	Thickness (mm)	Nominal Weight (kg/m)	Weight Range(kg/6.1m)	
			Min.	Max.
100-23 Cover Plate	1.0	0.885	5.4	5.6
	1.5	1.31	8.0	8.2

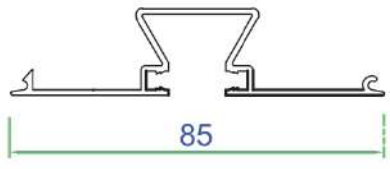


Venti Plate


Section Number	Thickness (mm)	Nominal Weight (kg/m)	Weight Range(kg/6.1m)	
			Min.	Max.
100-24 Venti Plate	1.0	0.491	3.0	3.2
	1.5	0.737	4.5	4.7

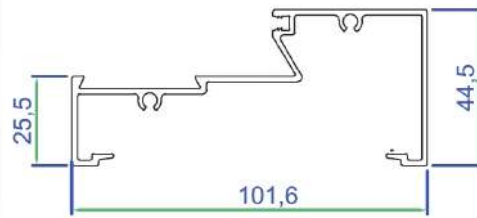

Section Number	Thickness (mm)	Nominal Weight (kg/m)	Weight Range(kg/6.1m)	
			Min.	Max.
100-25 (11B)	1.0	0.695	4.2	4.6
	1.25	0.869	5.3	5.5
	1.5	1.00	6.1	6.3

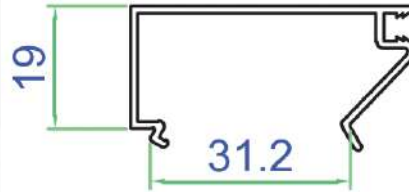


Section Number	Thickness (mm)	Nominal Weight (kg/m)	Weight Range(kg/6.1m)	
			Min.	Max.
100-26 Box Clip	1.0	0.262	1.6	1.8

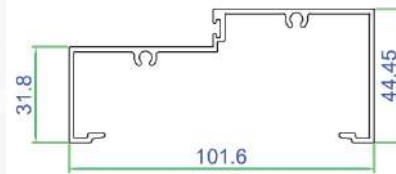

Chowkhat


Section Number	Thickness (mm)	Nominal Weight (kg/m)	Weight Range(kg/6.1m)	
			Min.	Max.
100-33 Chowkhat	1.15	0.778	4.70	4.90
	1.5	0.967	5.8	6.1





Section Number	Thickness (mm)	Nominal Weight (kg/m)	Weight Range(kg/6.1m)	
			Min.	Max.
100- 4A	1.0	0.56	3.4	3.6


Door

Chowkhat & Partion Section

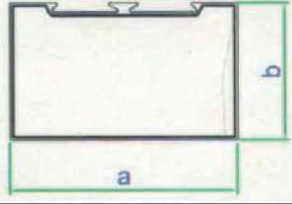
					
Section Number	Thickness (mm)	Nominal Weight (kg/m)	Weight Range(kg/6.1m)		
			Min.	Max.	
63-ST	0.7	0.426	2.6	2.8	
a =63.5	0.85	0.476	2.9	3.1	
b = 38.0	1.2	0.672	4.1	4.3	

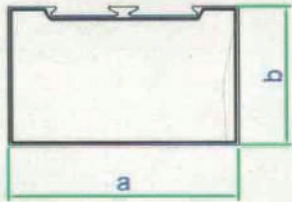					
Section Number	Thickness (mm)	Nominal Weight (kg/m)	Weight Range(kg/6.1m)		
			Min.	Max.	
100-ST	1.0	0.902	5.5	5.7	
a =100.5	1.2	1.065	6.5	6.7	
b = 44.5	1.5	1.229	7.5	7.7	

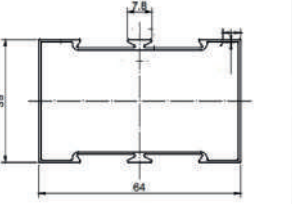					
Section Number	Thickness (mm)	Nominal Weight (kg/m)	Weight Range(kg/6.1m)		
			Min.	Max.	
63-DT	0.7	0.443	2.6	2.9	
a =63.5	0.85	0.492	3.0	3.2	
b = 38.0	1.2	0.689	4.2	4.4	




Number	Thickness (mm)	Nominal Weight (kg/m)	Weight Range(kg/6.1m)	
			Min.	Max.
100-DT	1.0	0.918	5.6	5.8
a = 100.5	1.2	1.016	6.2	6.4
b = 44.5	1.5	1.262	7.7	7.9




Partition Clip


Section Number	Thickness (mm)	Nominal Weight (kg/m)	Weight Range(kg/6.1m)	
			Min.	Max.
Partition Clip	0.6	0.06	0.35	0.40
	0.7	0.073	0.450	0.500




Section Number	Thickness (mm)	Nominal Weight (kg/m)	Weight Range(kg/6.1m)	
			Min.	Max.
Door Top (a=47,b=44)	0.9	0.491	3.00	3.20
Door Top (a=83,b=44)	1.2	0.885	5.40	5.60



Section Number	Thickness (mm)	Nominal Weight (kg/m)	Weight Range(kg/14')	
			Min.	Max.
Door Vertical (a=47,b=44)	0.9	0.466	2.00	2.20
Door Vertical (a=83,b=44)	1.2	0.960	4.10	4.30




Section Number	Thickness (mm)	Nominal Weight (kg/m)	Weight Range(kg/6.1m)	
			Min.	Max.
Door Middle (a=47,b=44)	0.9	0.49	3.00	3.30
Door Middle (a=83,b=44)	1.2	0.918	5.60	5.80




Door Middle

Section Number	Thickness (mm)	Nominal Weight (kg/m)	Weight Range(kg/6.1m)	
			Min.	Max.
100-20 A Door Middle	1.0	0.590	3.40	3.60




100-18


Section Number	Thickness (mm)	Nominal Weight (kg/m)	Weight Range(kg/6.1m)	
			Min.	Max.
100-18 Top & Side	1.0	0.557	3.4	3.6
	1.5	0.787	4.80	5.10




Section Number	Thickness (mm)	Nominal Weight (kg/m)	Weight Range(kg/4.27m)	
			Min.	Max.
100-20 Door Verticle	1.0	0.585	2.5	2.7
	1.5	0.829	3.54	3.70




Section Number	Thickness (mm)	Nominal Weight (kg/m)	Weight Range(kg/6.1m)	
			Min.	Max.
76 Chowkhat(A)	1.0	0.639	3.90	4.10




Section Number	Thickness (mm)	Nominal Weight (kg/m)	Weight Range(kg/6.1m)	
			Min.	Max.
64 Top & Side	1.0	0.557	3.4	3.6
	1.5	0.795	4.0	4.20




Section Number	Thickness (mm)	Nominal Weight (kg/m)	Weight Range(kg/6.1m)	
			Min.	Max.
65 Door Vertical	1.0	0.606	3.70	4.00

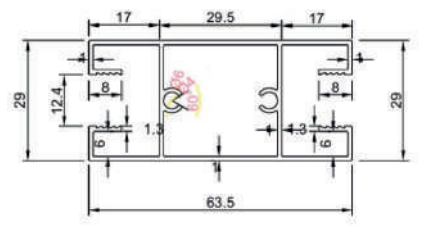


Section Number	Thickness (mm)	Nominal Weight (kg/m)	Weight Range(kg/6.1m)	
			Min.	Max.
Door Top & Side	1.0	0.688	4.20	4.40




Section Number	Thickness (mm)	Nominal Weight (kg/m)	Weight Range(kg/6.1m)	
			Min.	Max.
63 Chowkhat(A)	1.0	0.792	2.60	2.90



Section Number	Thickness (mm)	Nominal Weight (kg/m)	Weight Range(kg/6.1m)	
			Min.	Max.
63 Chowkhat(B)	1.0	0.606	3.70	4.0




Section Number	Thickness (mm)	Nominal Weight (kg/m)	Weight Range(kg/6.1m)	
			Min.	Max.
63 Chowkhat(C)	1.0	0.540	3.30	3.60




Section Number	Thickness (mm)	Nominal Weight (kg/m)	Weight Range(kg/6.1m)	
			Min.	Max.
63 Chowkhat	1.0	0.525	3.2	3.6


100 Series Casement Section




Section Number	Thickness (mm)	Nominal Weight (kg/m)	Weight Range(kg/6.1m)	
			Min.	Max.
100-8	1.0	0.295	1.8	2.1




Number	Thickness (mm)	Nominal Weight (kg/m)	Weight Range(kg/6.1m)	
			Min.	Max.
100-9	1.0	0.302	1.80	2.0




Section Number	Thickness (mm)	Nominal Weight (kg/m)	Weight Range(kg/6.1m)	
			Min.	Max.
100-9A	1	0.344	2.1	2.3




Section Number	Thickness (mm)	Nominal Weight (kg/m)	Weight Range(kg/6.1m)	
			Min.	Max.
100-11	1	0.459	2.8	3.0



Section Number	Thickness (mm)	Nominal Weight (kg/m)	Weight Range(kg/6.1m)	
			Min.	Max.
100-11(1)	1	0.393	2.4	2.6




Section Number	Thickness (mm)	Nominal Weight (kg/m)	Weight Range(kg/6.1m)	
			Min.	Max.
100-37	1.0	0.467	2.85	3.00




Mullion

Section Number	Thickness (mm)	Nominal Weight (kg/m)	Weight Range(kg/6.1m)	
			Min.	Max.
100- Mullion	0	0.000	0.0	0.0




Section Number	Thickness (mm)	Nominal Weight (kg/m)	Weight Range(kg/6.1m)	
			Min.	Max.
100- Shutter	0	0.000	0.0	0.0




Mullion

Section Number	Thickness (mm)	Nominal Weight (kg/m)	Weight Range(kg/6.1m)	
			Min.	Max.
100-12	1.0	0.47	2.8	3.0




Mullion Clip

Section Number	Thickness (mm)	Nominal Weight (kg/m)	Weight Range(kg/6.1m)	
			Min.	Max.
100-14	0.9	0.17	1.0	1.2



Section Number	Thickness (mm)	Nominal Weight (kg/m)	Weight Range(kg/6.1m)	
			Min.	Max.
100-15	0.8	0.12	0.70	1.0




Hollow Z- Shutter

Section Number	Thickness (mm)	Nominal Weight (kg/m)	Weight Range(kg/6.1m)	
			Min.	Max.
Z- Shutter	0	0.000	0.0	0.0




Section Number	Thickness (mm)	Nominal Weight (kg/m)	Weight Range(kg/6.1m)	
			Min.	Max.
0	0	0.000	0.0	0.0




Hollow Shutter

Section Number	Thickness (mm)	Nominal Weight (kg/m)	Weight Range(kg/6.1m)	
			Min.	Max.
0	0	0.000	0.0	0.0




Section Number	Thickness (mm)	Nominal Weight (kg/m)	Weight Range(kg/6.1m)	
			Min.	Max.
0	0	0.000	0.0	0.0




Section Number	Thickness (mm)	Nominal Weight (kg/m)	Weight Range(kg/6.1m)	
			Min.	Max.
0	0	0.000	0.0	0.0


Curtain Wall & Glazing Section




Section Number	Thickness (mm)	Nominal Weight (kg/m)	Weight Range(kg/6.1m)	
			Min.	Max.
CW-D (50*60)	0.80	0.754	4.60	4.80
	1.0	0.820	5.00	5.20
	1.20	0.983	6.00	6.20
	1.60	1.300	8.00	8.20

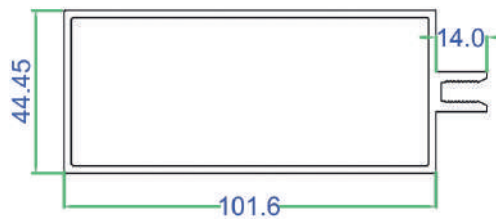


Number	Thickness (mm)	Nominal Weight (kg/m)	Weight Range(kg/6.1m)	
			Min.	Max.
CW-D (101*44)	1.6	1.56	9.5	10.5
	0.0	0.000	0.00	0.00
	0.00	0.000	0.00	0.00




Number	Thickness (mm)	Nominal Weight (kg/m)	Weight Range(kg/6.1m)	
			Min.	Max.
CW-D (76*60)	1.2	1.131	6.9	7.3
	0.0	0.000	0.00	0.00
	0.00	0.000	0.00	0.00




Number	Thickness (mm)	Nominal Weight (kg/m)	Weight Range(kg/6.1m)	
			Min.	Max.
CW-S (50*50)	1.0	0.639	3.90	4.10
	1.1	0.639	3.90	4.10
	1.35	0.738	4.50	4.70

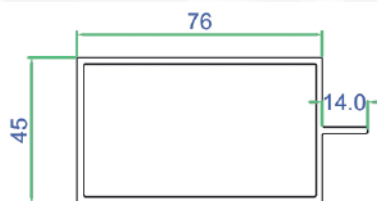


Number	Thickness (mm)	Nominal Weight (kg/m)	Weight Range(kg/6.1m)	
			Min.	Max.
CW-S (76*45)	2.0	1.28	7.8	8.1




Section Number	Thickness (mm)	Nominal Weight (kg/m)	Weight Range(kg/6.1m)	
			Min.	Max.
CW-DG (67*50)	1.85	1.60	9.780	9.980

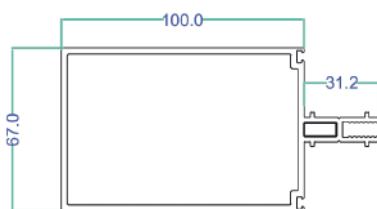

Section Number	Thickness (mm)	Nominal Weight (kg/m)	Weight Range(kg/6.1m)	
			Min.	Max.
CW-DG (67*100)	1.90	1.934	11.80	12.00

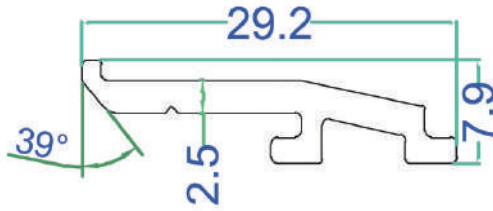


Section Number	Thickness (mm)	Nominal Weight (kg/m)	Weight Range(kg/6.1m)	
			Min.	Max.
CW-Clip	2.0	0.622	3.80	4.00

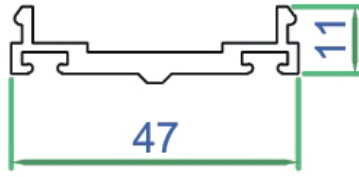

CW-Cover Plate

Section Number	Thickness (mm)	Nominal Weight (kg/m)	Weight Range(kg/6.1m)	
			Min.	Max.
CW-Cover Plate	2.0	0.622	3.80	4.00



Section Number	Thickness (mm)	Nominal Weight (kg/m)	Weight Range(kg/6.1m)	
			Min.	Max.
CW Pressure Plate	2.0	0.622	3.80	4.00




► Domal Series

- Sliding Window


► 18MM Sliding Window

- Two Track Top
- Two Track Bottom
- Three Track Top
- Three Track Bottom
- A Section
- H Section
- Interlock


Two Track Top

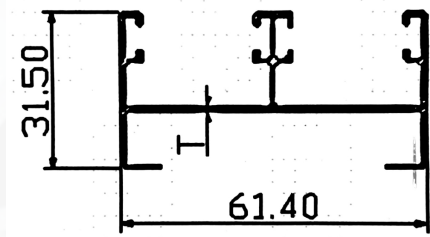				
Section Number	Thickness (mm)	Nominal Weight (kg/m)	Weight Range(kg/6.1m)	
			Min.	Max.
2Tr.Top	0.8	0.43	2.6	2.9


Two Track Bottom

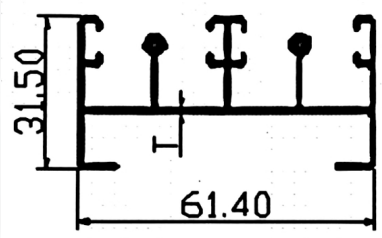				
Section Number	Thickness (mm)	Nominal Weight (kg/m)	Weight Range(kg/6.1m)	
			Min.	Max.
2Tr.Bottom	0.8	0.516	3.1	3.3


H Section

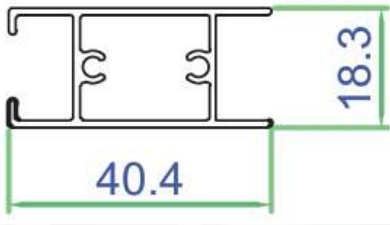				
Section Number	Thickness (mm)	Nominal Weight (kg/m)	Weight Range(kg/6.1m)	
			Min.	Max.
H- Section	0.8	0.320	1.9	2.1

Interlock

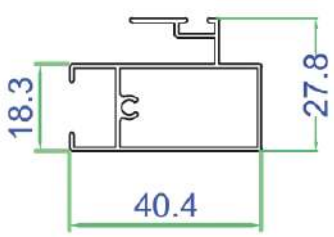				
Section Number	Thickness (mm)	Nominal Weight (kg/m)	Weight Range(kg/6.1m)	
			Min.	Max.
Interlock	0.8	0.360	2.2	2.4

A Section

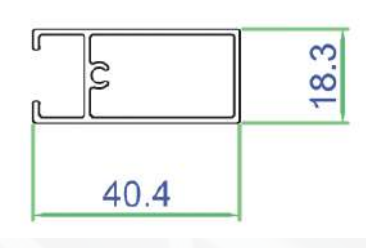				
Section Number	Thickness (mm)	Nominal Weight (kg/m)	Weight Range(kg/6.1m)	
			Min.	Max.
A- Section	0.8	0.30	1.8	2.1




► Kitchen Series


- Kitchen Profile Cabinet Sections




Section Number	Thickness (mm)	Nominal Weight (kg/m)	Weight Range(kg/6.1m)	
			Min.	Max.
K-1	0.80	0.754	4.600	4.800




Section Number	Thickness (mm)	Nominal Weight (kg/m)	Weight Range(kg/6.1m)	
			Min.	Max.
K-2	1.00	0.354	2.16	2.26




Section Number	Thickness (mm)	Nominal Weight (kg/m)	Weight Range(kg/6.1m)	
			Min.	Max.
K-3	1.00	0.295	1.80	2.00




Section Number	Thickness (mm)	Nominal Weight (kg/m)	Weight Range(kg/6.1m)	
			Min.	Max.
K-4	1.00	0.336	2.05	2.15




Section Number	Thickness (mm)	Nominal Weight (kg/m)	Weight Range(kg/6.1m)	
			Min.	Max.
K-5	1.00	0.344	2.100	2.250




Section Number	Thickness (mm)	Nominal Weight (kg/m)	Weight Range(kg/6.1m)	
			Min.	Max.
K-6	2.1	1.655	10.100	10.300

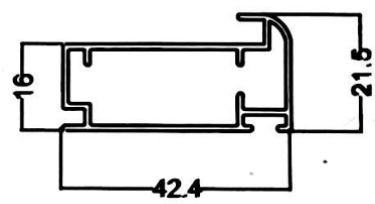


Section Number	Thickness (mm)	Nominal Weight (kg/m)	Weight Range(kg/6.1m)	
			Min.	Max.
K-7	1.00	0.409	2.500	2.700

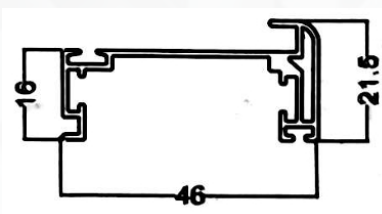


Section Number	Thickness (mm)	Nominal Weight (kg/m)	Weight Range(kg/6.1m)	
			Min.	Max.
K-8	1.00	0.377	2.300	2.500

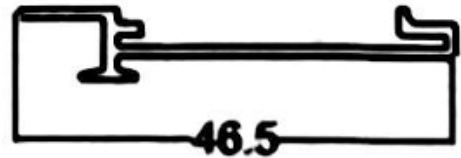


Section Number	Thickness (mm)	Nominal Weight (kg/m)	Weight Range(kg/6.1m)	
			Min.	Max.
K-9	1.00	0.180	1.100	1.300

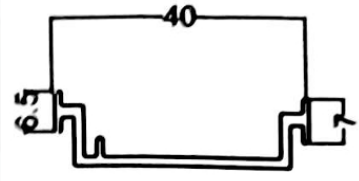


Section Number	Thickness (mm)	Nominal Weight (kg/m)	Weight Range(kg/6.1m)	
			Min.	Max.
K-10	1.10	0.197	1.200	1.400

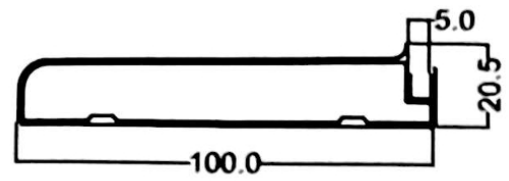


Section Number	Thickness (mm)	Nominal Weight (kg/m)	Weight Range(kg/6.1m)	
			Min.	Max.
K-11	1.00	1.00	2.100	1.00

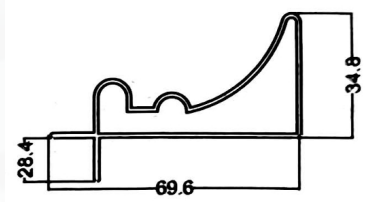


Section Number	Thickness (mm)	Nominal Weight (kg/m)	Weight Range(kg/6.1m)	
			Min.	Max.
K-12	1.17	0.639	3.900	4.100

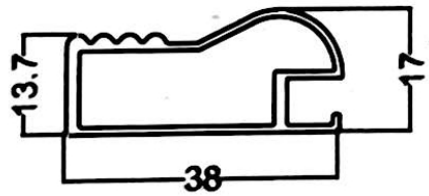


Section Number	Thickness (mm)	Nominal Weight (kg/m)	Weight Range(kg/6.1m)	
			Min.	Max.
K-13	1.00	0.344	2.100	2.300




Section Number	Thickness (mm)	Nominal Weight (kg/m)	Weight Range(kg/6.1m)	
			Min.	Max.
K-14	1.00	0.167	1.00	1.200




Section Number	Thickness (mm)	Nominal Weight (kg/m)	Weight Range(kg/6.1m)	
			Min.	Max.
K-15	1.00	0.299	1.800	2.000




Section Number	Thickness (mm)	Nominal Weight (kg/m)	Weight Range(kg/6.1m)	
			Min.	Max.
K-16	1.00	0.325	2.000	2.200

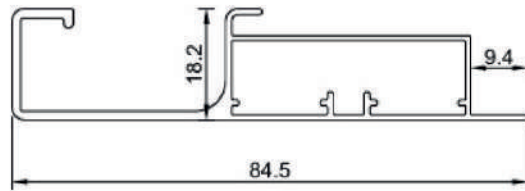

Section Number	Thickness (mm)	Nominal Weight (kg/m)	Weight Range(kg/6.1m)	
			Min.	Max.
K-17	1.10	0.562	3.400	3.600

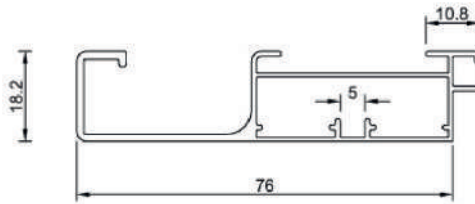


Section Number	Thickness (mm)	Nominal Weight (kg/m)	Weight Range(kg/6.1m)	
			Min.	Max.
K-18	1.17	0.590	3.600	3.800

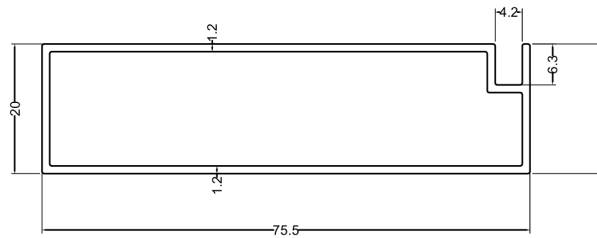


Section Number	Thickness (mm)	Nominal Weight (kg/m)	Weight Range(kg/6.1m)	
			Min.	Max.
K-19	1.2	0.59	3.6	3.8

► Miscellaneous/ General Purpose


- Sliding Section
- Corner Section
- L tube
- Photo Frame
- L Section
- Rectangular Tube
- Square Tube
- Tower Bolt




Number	Thickness (mm)	Nominal Weight (kg/m)	Weight Range(kg/6.1m)	
			Min.	Max.
(38*25)	2.0	0.327	1.2	1.3
	0.0	0.000	0.00	0.00
(38*25)	2.35	0.377	1.4	1.5

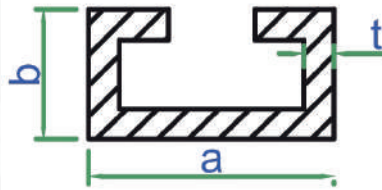


Number	Thickness (mm)	Nominal Weight (kg/m)	Weight Range(kg/6.1m)	
			Min.	Max.
C- Channel (30*28)	1.9	0.459	2.8	3.0
	2.5	0.622	3.8	4.0
	0.00	0.000	0.00	0.00




Number	Thickness (mm)	Nominal Weight (kg/m)	Weight Range(kg/6.1m)	
			Min.	Max.
Equal Angle (38*38)	2.0	0.409	1.5	1.6
	0.0	0.000	0.00	0.00
Equal Angle (25*25)	1.0	0.213	0.45	0.55




Number	Thickness (mm)	Nominal Weight (kg/m)	Weight Range(kg/6.1m)	
			Min.	Max.
C1-Section	0.9	0.188	1.9	2.2




Square Tube	Thickness (mm)	Nominal Weight (kg/m)	Weight Range(kg/6.1m)	
			Min.	Max.
25*25	1.5	0.54	3.3	3.4
50*50	1.5	0.786	4.8	4.9




Rectangular Tube	Thickness (mm)	Nominal Weight (kg/m)	Weight Range(kg/6.1m)	
			Min.	Max.
38*25	0.75	0.23	1.4	1.6
75*25	1.5	0.77	4.7	4.8
50*25	1.5	0.57	3.5	3.7
63*38	0.6	0.33	2.0	2.1




Number	Thickness (mm)	Nominal Weight (kg/m)	Weight Range(kg/6.1m)	
			Min.	Max.
G- Section	2.0	0.622	3.8	4.0




Number	Thickness (mm)	Nominal Weight (kg/m)	Weight Range(kg/6.1m)	
			Min.	Max.
11mm Tower Bolt	1.0	0.185	1.1	1.3

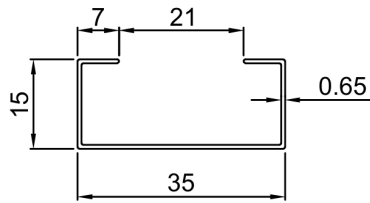


Number	Thickness (mm)	Nominal Weight (kg/m)	Weight Range(kg/6.1m)	
			Min.	Max.
Louber Section	0.65	0.131	0.8	1.0




Number	Thickness (mm)	Nominal Weight (kg/m)	Weight Range(kg/6.1m)	
			Min.	Max.
Angle (11*10)	0.95	0.56	0.34	0.50




Number	Thickness (mm)	Nominal Weight (kg/m)	Weight Range(kg/6.1m)	
			Min.	Max.
8.5 Rod	8.5	0.153	0.9	1.0




Number	Thickness (mm)	Nominal Weight (kg/m)	Weight Range(kg/6.1m)	
			Min.	Max.
10.2 Rod	10.2	0.218	1.3	1.4




Number	Thickness (mm)	Nominal Weight (kg/m)	Weight Range(kg/6.1m)	
			Min.	Max.
13mm Tower Bolt	0.9	0.240	1.4	1.6




Number	Thickness (mm)	Nominal Weight (kg/m)	Weight Range(kg/6.1m)	
			Min.	Max.
Photo Frame	0.4	0.057	0.350	0.450





Number	Thickness (mm)	Nominal Weight (kg/m)	Weight Range(kg/6.1m)	
			Min.	Max.
Door Hing-1	2.5	0.56	3.4	3.7

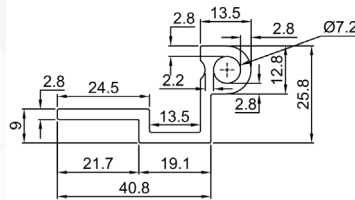



Number	Thickness (mm)	Nominal Weight (kg/m)	Weight Range(kg/6.1m)	
			Min.	Max.
Door Hing- 2	2.8	0.730	4.4	4.7

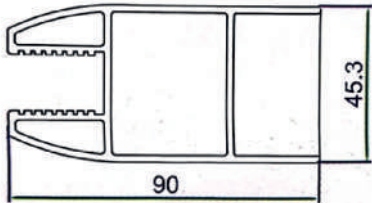				
Number	Thickness (mm)	Nominal Weight (kg/m)	Weight Range(kg/6.1m)	
			Min.	Max.
Fish Section	2.3	2.13	13.00	13.30


				
Section Number	Thickness (mm)	Nominal Weight (kg/m)	Weight Range(kg/6.1m)	
			Min.	Max.
P-1	1.00	0.116	0.710	1.000

				
Section Number	Thickness (mm)	Nominal Weight (kg/m)	Weight Range(kg/6.1m)	
			Min.	Max.
P-2	1.00	0.117	0.715	1.000

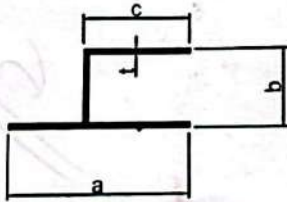
				
Section Number	Thickness (mm)	Nominal Weight (kg/m)	Weight Range(kg/6.1m)	
			Min.	Max.
Bus Body H (30*12*18)	1.0	0.13	0.750	0.800




Section Number	Thickness (mm)	Nominal Weight (kg/m)	Weight Range(kg/6.1m)	
			Min.	Max.
J Section (25*18)	1.0	0.11	0.50	0.60

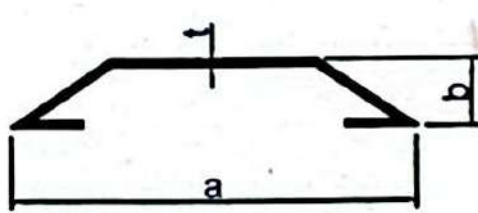


Section Number	Thickness (mm)	Nominal Weight (kg/m)	Weight Range(kg/6.1m)	
			Min.	Max.
Taper Gola (60*10)	1.0	0.2	1.2	1.3

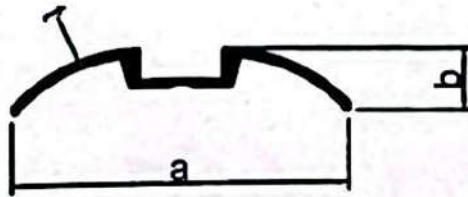


Section Number	Thickness (mm)	Nominal Weight (kg/m)	Weight Range(kg/6.1m)	
			Min.	Max.
Chabi Gola (50*9)	1.0	0.12	0.70	0.80




Section Number	Thickness (mm)	Nominal Weight (kg/m)	Weight Range(kg/6.1m)	
			Min.	Max.
Display Section (40*40)	1.7	1.7	10.0	11.0

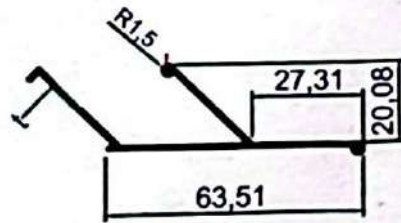


Section Number	Thickness (mm)	Nominal Weight (kg/m)	Weight Range(kg/6.1m)	
			Min.	Max.
F- Section (63*20)	1.0	0.30	1.8	2.0




Section Number	Thickness (mm)	Nominal Weight (kg/m)	Weight Range(kg/6.1m)	
			Min.	Max.
Mazda Section (41*18*39)	1.0	0.30	1.8	2.0

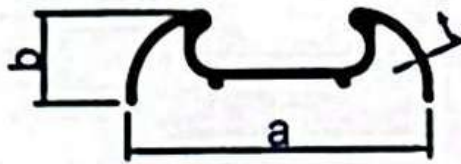


Section Number	Thickness (mm)	Nominal Weight (kg/m)	Weight Range(kg/6.1m)	
			Min.	Max.
Gattu Gola (25*9)	1.0	0.15	0.90	1.0

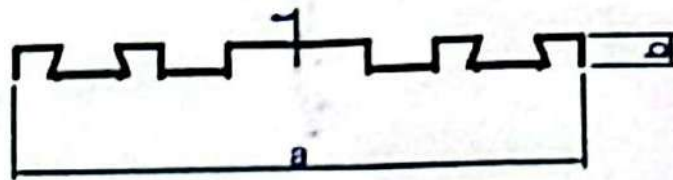


Section Number	Thickness (mm)	Nominal Weight (kg/m)	Weight Range(kg/6.1m)	
			Min.	Max.
Bus Body (120*6)	1.0	0.528	3.0	3.1

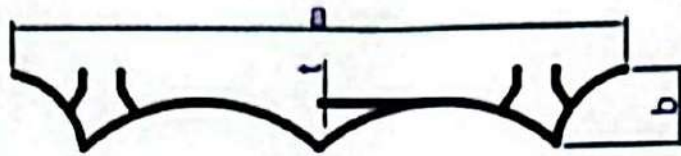


Section Number	Thickness (mm)	Nominal Weight (kg/m)	Weight Range(kg/6.1m)	
			Min.	Max.
Jaipuria Section	1.0	0.5	3.0	3.1

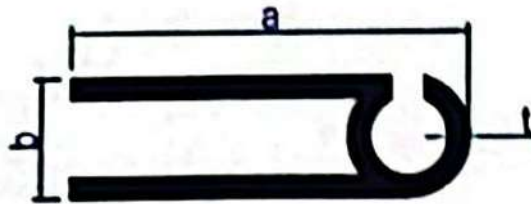


Section Number	Thickness (mm)	Nominal Weight (kg/m)	Weight Range(kg/6.1m)	
			Min.	Max.
AC Beat (20*9)	1.0	0.15	0.9	1.0



Section Number	Thickness (mm)	Nominal Weight (kg/m)	Weight Range(kg/6.1m)	
			Min.	Max.
T- Section (25*25)	1.3	0.176	1.0	1.1



Section Number	Thickness (mm)	Nominal Weight (kg/m)	Weight Range(kg/6.1m)	
			Min.	Max.
Corner Section (62*62)	1.5	1.05	6.4	6.6

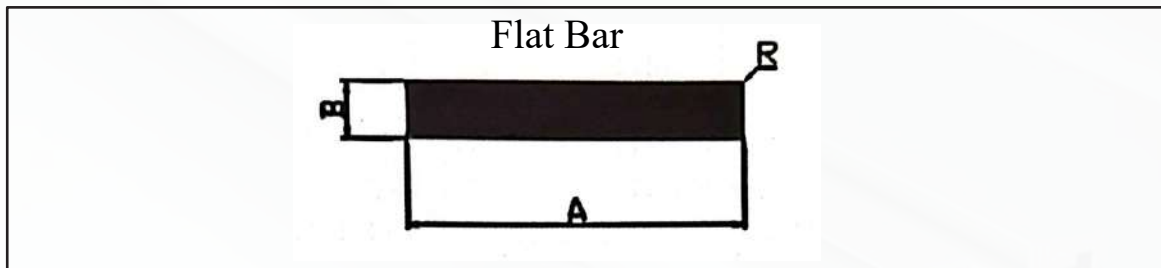

Size	Thickness (mm)	Nominal Weight (kg/m)	Weight Range(kg/6.1m)	
			Min.	Max.
25	6	0.437	2.6	2.8
25	10	0.68	4.1	4.2
25	12	0.85	5.0	5.1
30	10	0.83	5.0	5.1
38	10	1.0	6.1	6.2
40	10	1.12	6.8	6.9
50	10	1.393	8.4	8.5
60	10	1.557	9.4	9.5
75	10	2.077	12.6	12.8
80	10	2.268	13.8	14.0
100	10	2.773	16.8	17.0
120	12	3.92	23.9	24.0
150	6	2.5	15.0	15.2



Our Commitment to Quality

At Laxmi Aluminium, we prioritize excellence in manufacturing, ensuring that every product meets the highest industry standards. Our state-of-the-art production process guarantees strength, precision, and reliability in all our aluminium solutions.

Sustainability & Environmental Responsibility

We are dedicated to eco-friendly manufacturing, using 100% recyclable aluminium and energy-efficient processes to minimize our environmental footprint.

Get in Touch

Address: Duhabi-3, Nepal

Contact: +977 9807045110, +977 985-2045110

Email: info@laipl.com.np

Website: www.laipl.com.np

1. Architechural Section List	1
• 78 Series	2
• 90 Series	7
• 100 Series	14
Sliding Window	15
Door, Chowkhat & Partition Section	19
Casment Section	24
Curtain Wall & Glazing Section	29
• Domal Series	32
• 18MM Sliding Window	35
• Kitchen Series	39
• Miscellaneous/ Genearl Purpose	45

1. Architechural Section List	1
• 78 Series	2
• 90 Series	7
• 100 Series	14
Sliding Window	15
Door, Chowkhat & Partition Section	19
Casment Section	24
Curtain Wall & Glazing Section	29
• Domal Series	32
• 18MM Sliding Window	35
• Kitchen Series	39
• Miscellaneous/ Genearl Purpose	45